TOA

LINE ARRAY SPEAKER

SR-S4SWP

■DESCRIPTION

The SR-S4SWP is a two-way line array speaker ideal for short distance sound transmission and configures a line array by arranging speaker elements vertically close to each other.
It satisfies the water protection requirements set down in the IPX4 Standard.
It can be converted into the bi-amplifier drive system by changing the internal connection.
It can be used for high-impedance applications with the installation of the optional MT-S0601 Matching Transformer.

■SPECIFICATIONS

Enclosure	Sealed type
Power Handling Capacity	Continuous program: 600 W (single-amp mode) Low 240 W, High 240 W (bi-amp mode)
Rated Impedance	8 Ω (single-amp mode) Low 8 Ω, High 8 Ω (bi-amp mode)
Sensitivity	93 dB (1 W, 1 m)
Frequency Response	70 Hz – 20 kHz (when using DP-0206 (option))
Crossover Frequency	3.5 kHz
Directivity Angle	Horizontal: 90°, Vertical: 10°
Speaker Component	Low frequency: 10 cm cone-type × 8 High frequency: 2.5 cm balanced dome-type × 24
Connected Cable	Direct cable withdrawal from internal speaker: ø8.6 mm, conductor cross section: 1.25 mm², 4-core cable, 3 m
Operating Temperature	−10 °C to +50 °C
Water Protection	IPX4
Finish	Enclosure: Plywood, white, urethane coating Front grille: Punched stainless steel, white, paint
Dimensions	160 (W) × 892 (H) × 303 (D) mm (excluding connected cable)
Weight	16 kg
Accessory	Bi-amplifier drive rating label ···1, Bi-amplifier drive input indication label ···1
Option	Matching transformer: MT-S0601, Extension plate: SR-EP4WP, Wall tilt bracket: SR-TB4WP, Protection pad: SR-PP4, Digital processor: DP-0206

■APPEARANCE

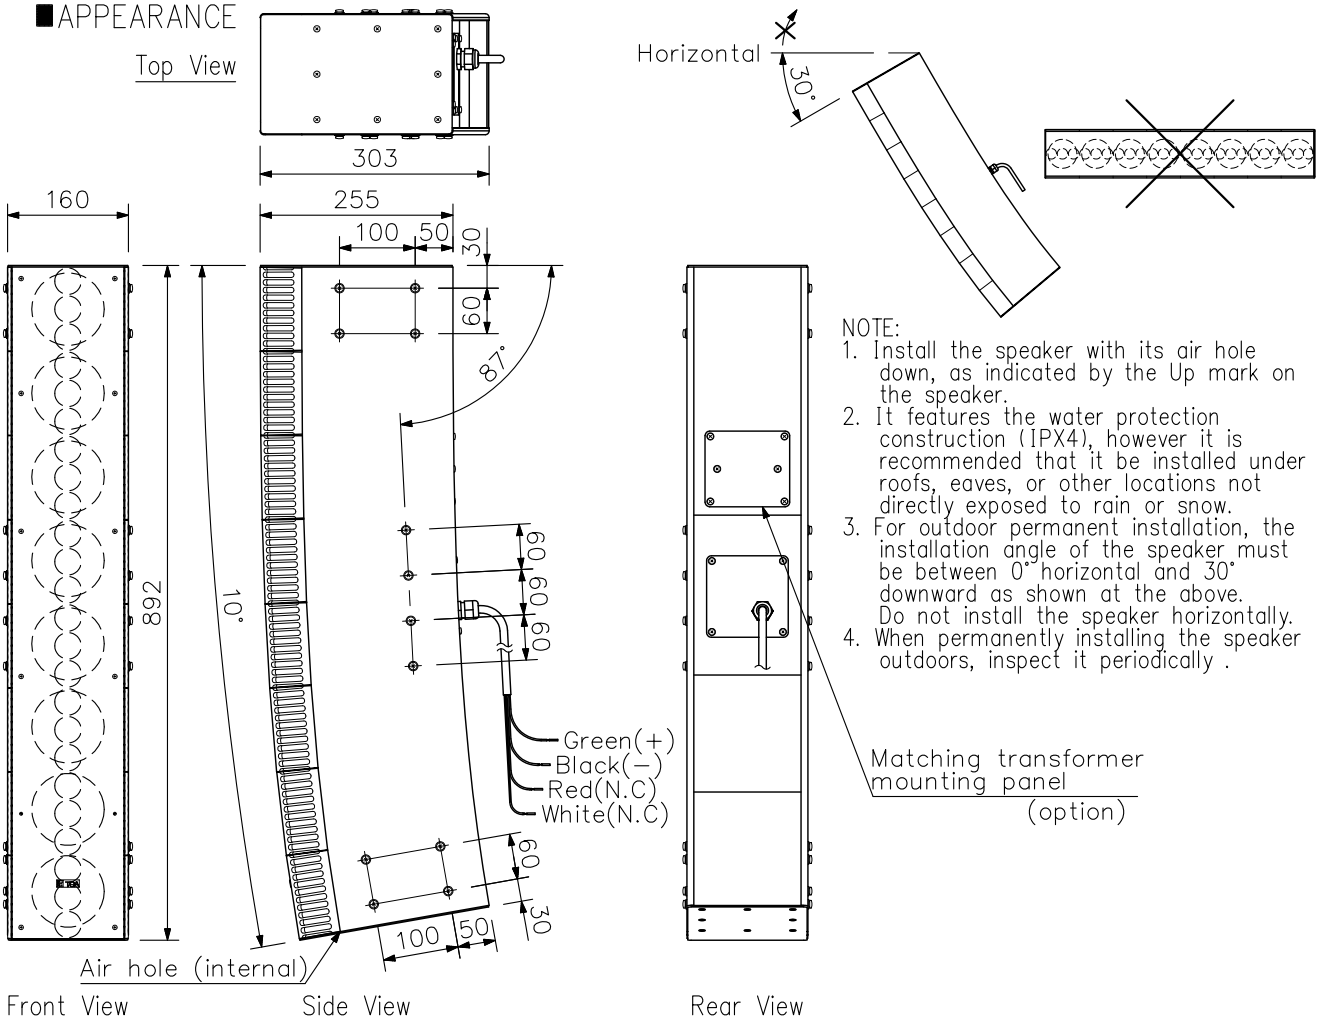

NOTE:
1. Install the speaker with its air hole down, as indicated by the Up mark on the speaker.
2. It features the water protection construction (IPX4), however it is recommended that it be installed under roofs, eaves, or other locations not directly exposed to rain or snow.
3. For outdoor permanent installation, the installation angle of the speaker must be between 0° horizontal and 30° downward as shown at the above. Do not install the speaker horizontally.
4. When permanently installing the speaker outdoors, inspect it periodically .

UNIT: mm SCALE: 1/10