

## DESCRIPTION


The TS-918 is an interface necessary for incorporating the Wired conference unit(s) in the conference system. It is connected to the TS-910 Central unit with a coaxial cable and to the TS-919B1 or TS-919B4 Bridge unit with a Category 5 cable.  
With the use of an optional rack mounting bracket, it can be mounted in an EIA Standard equipment rack (1 unit size).

## SPECIFICATIONS

Power Source	100 – 240 V AC, 50/60 Hz (use of the supplied AC adapter)
Power Consumption	74.4 W
Current Consumption	Max. 3.1 A DC (when 24 V DC is supplied from the accessory AC adapter)
Gain	Upstream: +16.5 dB Downstream: +12.5 dB
Connection Terminal	Central unit connection terminal: BNC jack Bridge unit connection terminal: RJ45 connector
LED Indicator	Connection status indicators (3 LEDs each on the front and rear panels), Power indicator
Number of Connectable Chairman/Delegate Units	Up to 24 units (when using 21 units of TS-919B1 or 6 units of TS-919B4, both optional Bridge units)
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	90 %RH or less (no condensation)
Finish	Panel: Aluminum, black, 30% gloss, melamine-baked paint case: Pre-coated steel plate, black
Dimensions	210 (W) × 44 (H) × 296.5 (D) mm (8.27" × 1.73" × 11.67")
Weight	1.6 kg (3.53 lb)
Accessory	AC adapter (Cord length: 1.8 m (5.91 ft) DC cord, and 2 m (6.56 ft) detachable AC cord)*1, BNC plug-to-BNC plug cord (50 cm (1.64 ft)) *1
Option	Rack mounting bracket: MB-15B-BK (for rack mounting one TS-918 unit) MB-15B-J (for rack mounting two TS-918 units)

\* Not supplied with the TS-918(KR). For the usable power supply cord and AC adapter, contact your nearest TOA dealer.

## APPEARANCE

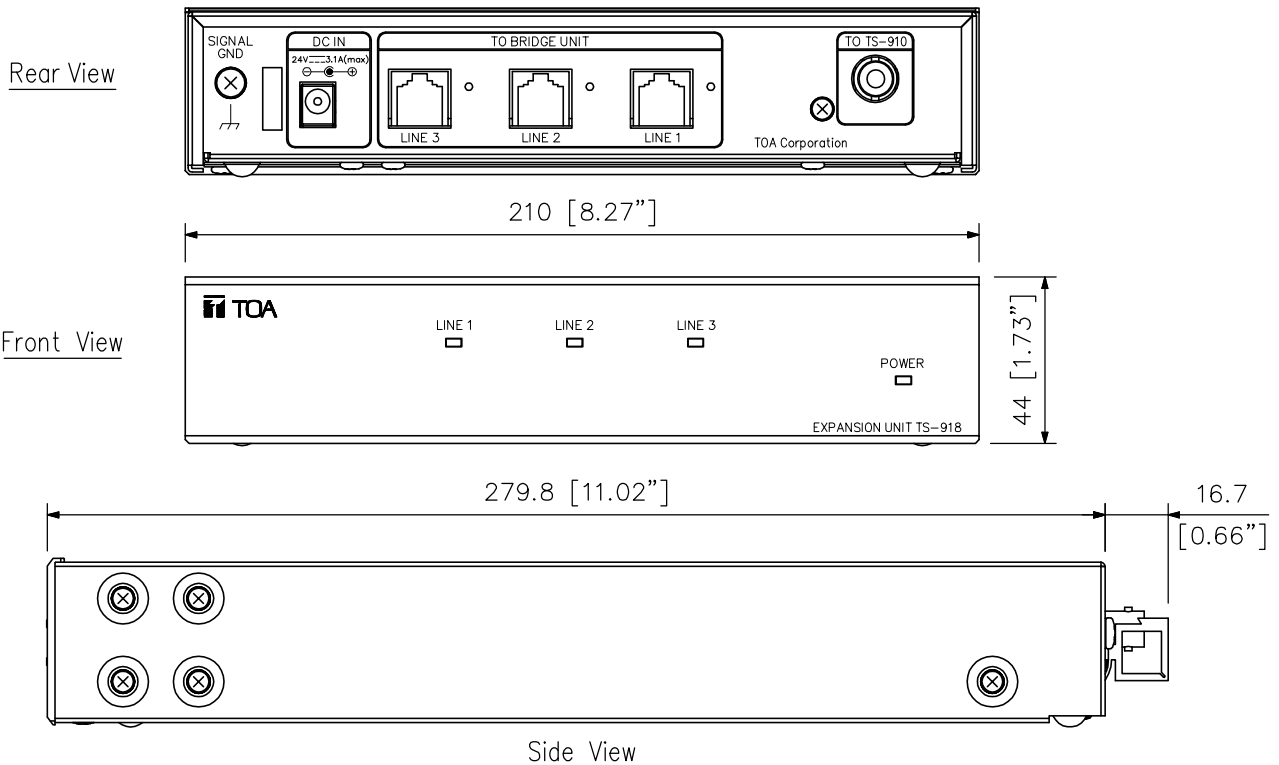

Version	CE	CE-AU	CE-GB	CN	US
AC plug					

UNIT: mm SCALE: 1/2