

DESCRIPTION


The U-21S is a line input module to be used in conjunction with the 900 series components and other TOA's equipment. It has an unbalanced input with screw terminals, remote volume control function, and gain control.

SPECIFICATIONS

* 0 dB=1 V

Power Source	24 V DC (supplied from the main frame)
Current Consumption	27 mA
Input Sensitivity	-20 dB* (rated output: -20 dB*), adjustable: -20 to +10 dB*
Input Impedance	220 kΩ, unbalanced
Frequency Response	20 Hz - 20 kHz ±1.5 dB
Distortion	0.05 % or less (1 kHz, output: 0 dB*)
Noise Level	-106 dB* (20 Hz - 20 kHz BPF)
Gain	-30 - 0 dB
Remote Control Range	0 to -55 dB
Connector	5 Screw terminals
Dimensions	35 (W) × 78 (H) × 88 (D) mm (1.38" × 3.07" × 3.46")
Weight	Max. 65 g (0.14 lb)

APPEARANCE

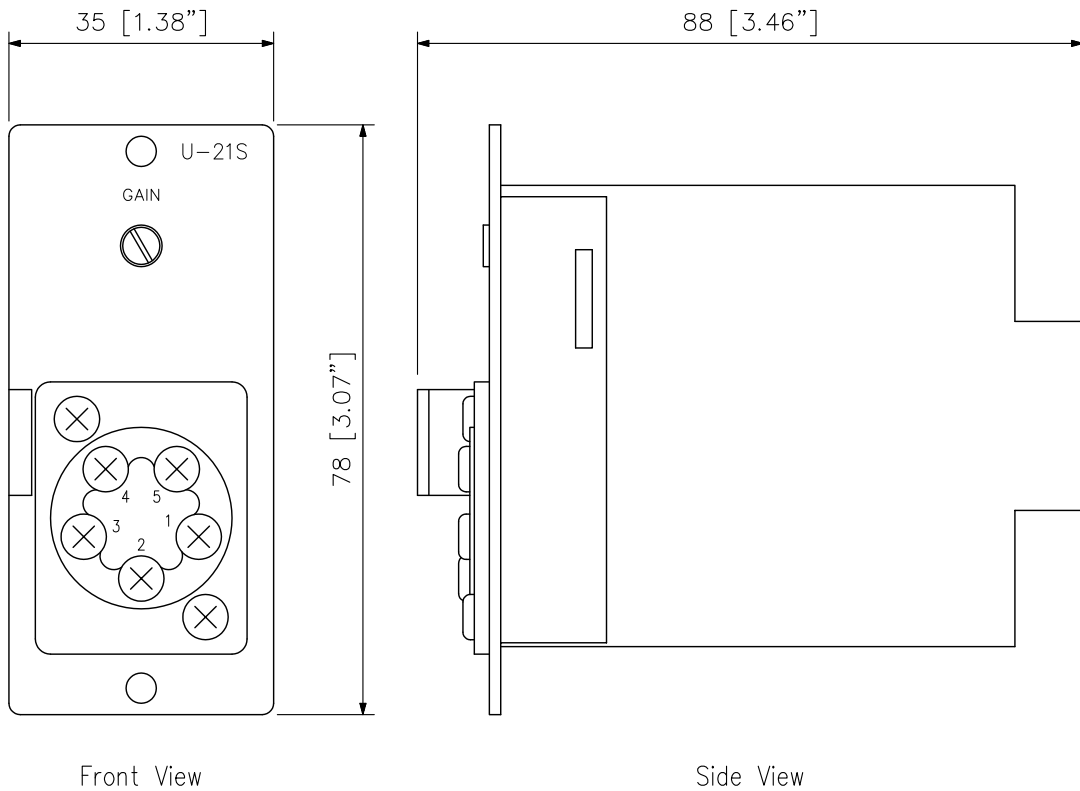

CONNECTION	1 :Line Output
	2 :Earth
	3 :Line Input
	4-5 :Potentiometer 10 kΩ

UNIT:mm SCALE:1/1