

### DESCRIPTION

The U-61S is a line input module to be used in conjunction with the 900 series components and other TOA's equipment.


It has an unbalanced line input with removable terminal block connector, compressor function and gain control.

### SPECIFICATIONS

\* 0 dB=1 V


Power Source	24 V DC (supplied from the main frame)
Current Consumption	30 mA
Input Sensitivity	-20 to +10 dB* (Rated output: -20 dB*)
Input Impedance	220 kΩ, unbalanced
Frequency Response	20 Hz - 20 kHz ±1.0 dB
Distortion	0.05 % or less (1 kHz, output: -6 dB*)
Noise Level	-90 dB* (20 Hz - 20 kHz BPF)
Gain	-30 - 0 dB
Compressor Range	20 dB (Threshold fixed input level: +2 dB*)
Connector	Terminal block (3P)
Dimensions	35 (W) × 78 (H) × 88 (D) mm (1.38" × 3.07" × 3.46")
Weight	Max. 60 g (0.13 lb)

### APPEARANCE

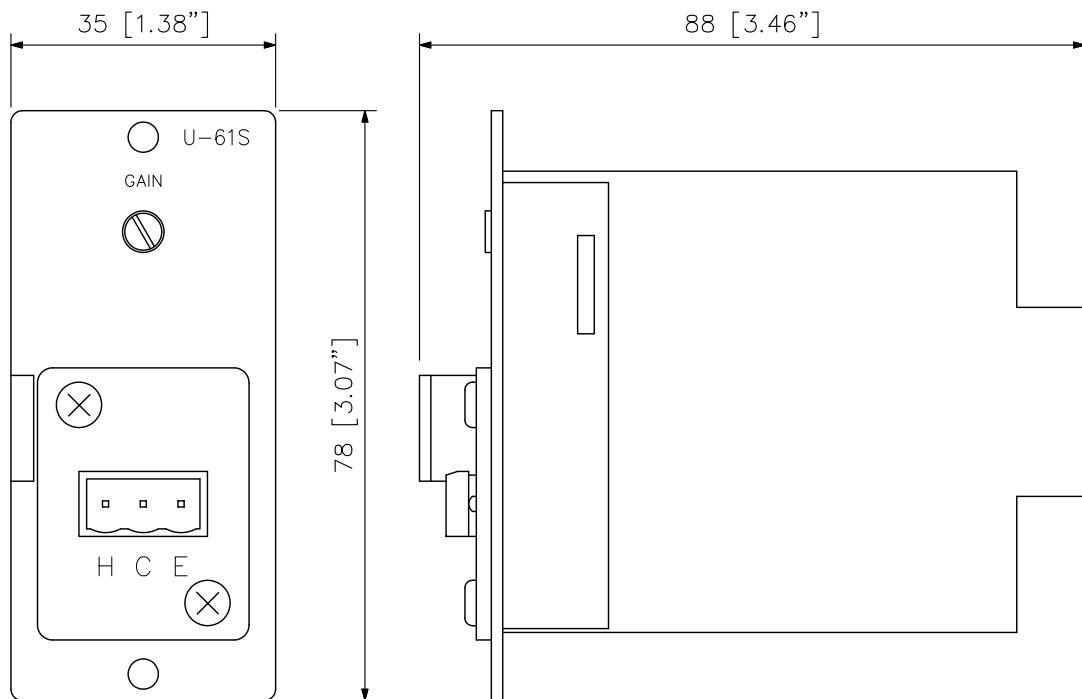

Front View

Side View

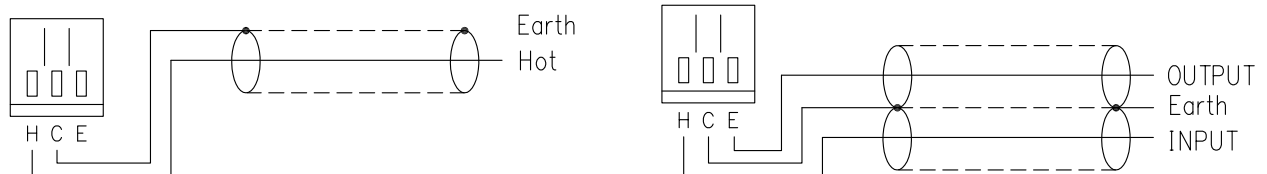

Connection Diagram

UNIT:mm SCALE:1/1