TOAMEGAPHONE (WITH WHISTLE SIGNAL) ER-2930W/(EU)

The ER-2930W is a shoulder megaphone having facilities of EXT. mic input, an AUX input, a DC power input, a battery meter whistle sound.
It can be mounted to the optional ST—16A speaker stand.
Handle and microphone with anti-bacteria treatment improve hygiene and safety during use.

Its microphone assembly are given germ—resistant treatment.

The newly developed polyimide diaphragm is employed to ensure high sound quality.

■ SPECIFICATIONS

(*1) 0 dB = 1 V

Power Source	Battery: R20P (D) × 10 (15 V DC)
	External Power: 12 V DC Battery
Rated Output	30 W
Maximum Output	45 W
Signal Sound	Whistle (1.6 to 2.4 kHz)
Battery Life	Voice: Approx. 17 hours (JEITA (*2)), Whistle: Approx. 90 min. (JEITA (*2))
Audible Range	Voice: Approx. 800 m (JEITA (*2)), Whistle: Approx. 1000 m (JEITA (*2))
AUX Input Šensitivity	-10 dB (*1) (300 mV), 10 k Ω (Ø3.5 mini jack, stereo plug acceptable) ,
, ,	volume control
EXT. Mic Input	600 Ω, unbalanced, Ø6.3 phone jack, volume control
Receiving Frequency	UHF (800 MHz Band), VHF (200 MHz Band)
Antenna	Fold-down flexible antenna
Diaphragm	Polyimide film (voice coil, bobbin)
Anti-bacteria Treatment	Microphone
Remaining Battery	LED (also serves as a power indicator)
Indication	Steady ON: Normal use, Flashing: Batteries need replacement
Operating Temperature	−10 °C to +40 °C
Finish	Horn ring: Vinyl chloride, gray
	Horn: Aluminum, light gray, paint
	Case top: Die—cast aluminum, gray, paint
	Strap: Nylon, black, Others: ABS resin, gray
Dimensions	Ø351 × 512 mm
Weight	3.8 kg (without batteries) , Microphone: 150 g
Accessory	∅3.5 mini plug (AUX input)…1, External power supply cord (1 m)…1,
	Splash-proof cover···1 (*3)
Option	Speaker stand: ST-16A, Microphone: DM series
	Wireless microphone: WM-3220 series, WM-3310 series, WM-4200 series, WM-4300 series
	Wireless tuner: WTU-3800 series, WTU-4800 series

(*2) JEITA: Japan electronics and information technology industries association. (EIAJ TT-4501A)
 (*3) Do not use the unit in heavy rains or strong winds, or in locations where the unit is directly exposed to water even using with the supplied splash-proof cover.


■ APPEARANCE

<Note on the audible range and battery life>

1. The indications of the audible range and battery life are based on the JEITA Standard (*2).

2. Audible Range presumes that the megaphone employs new batteries and is used on a quiet street. It varies depending on such conditions as battery consumption, ambient noise, wind direction and obstacles.

3. Battery Life assumes that megaphone is used for 30 minutes a day.

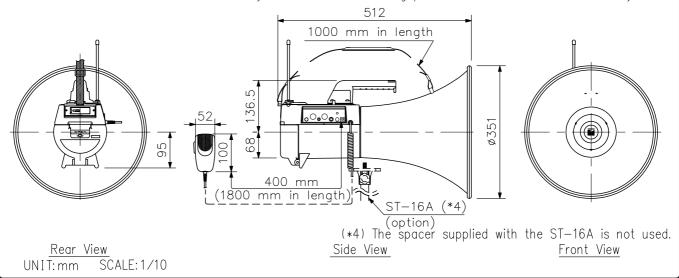

Note: Batteries are optional.